



1710-4000MHz 22dBi Dual Polarized Dish Antenna

Model	STD1740G22M2
Electrical Specifications	
Frequency Range	1710-2700/3300-4000MHz
Polarization	H+V/ $\pm 45^\circ$
Gain	18/22 dBi
VSWR	≤ 2.0
Horizontal Beamwidth	$19^\circ \pm 1^\circ / 9^\circ \pm 1^\circ$
Vertical Beamwidth	$17^\circ \pm 1^\circ / 6^\circ \pm 1^\circ$
F/B Ratio	≥ 25 dB
Isolation	≥ 23 dB
Nominal Impedance	50 Ω
Maximum Power	50 W
Lightning Protection	DC Ground
Mechanical Specifications	
Connector	2 xN-female with pigtail
Mounting Mast Size	$\Phi 30$ -50mm
Dish Size	$\Phi 60$ cm
Weight	3.9 kg
Max. Wind Velocity	210km/h
Operating Temperature	-40 \sim +65 $^\circ$ C

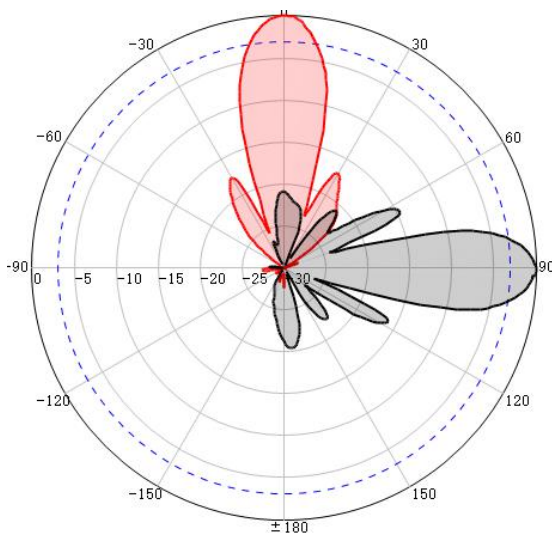

H-Pol@1710MHz

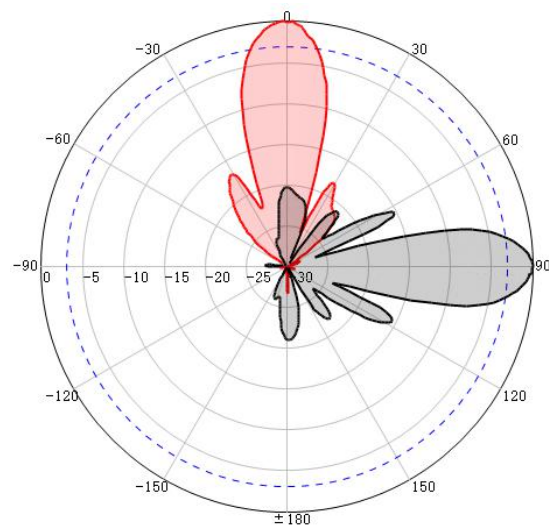

V-Pol@1710MHz

SANNY TELECOM EQUIPMENT CO., LIMITED


Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue, Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070


Fax: +86 757 8766 0500

Email: sales@sannytelecom.com


Website: www.sannytelecom.com

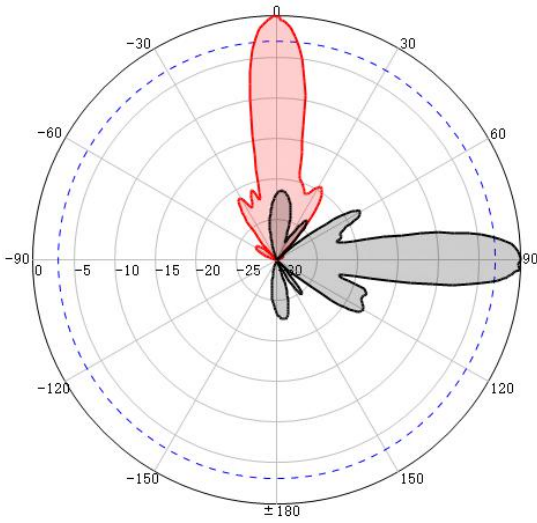


H-Pol@2700MHz

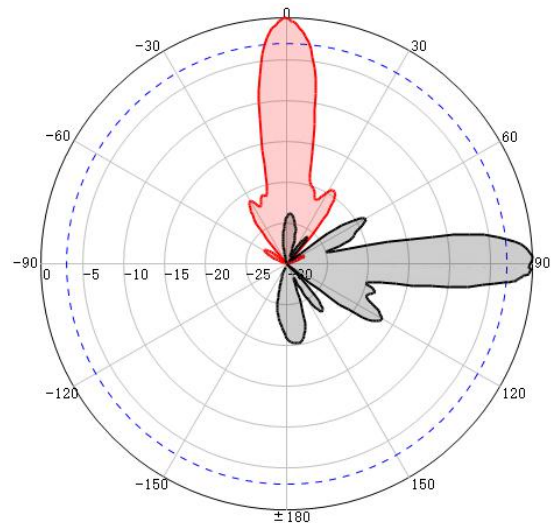

V-Pol@2700MHz

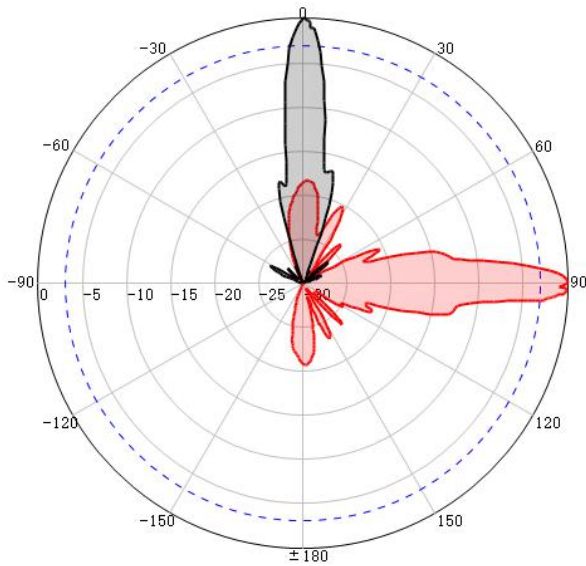

H-Pol@3500MHz

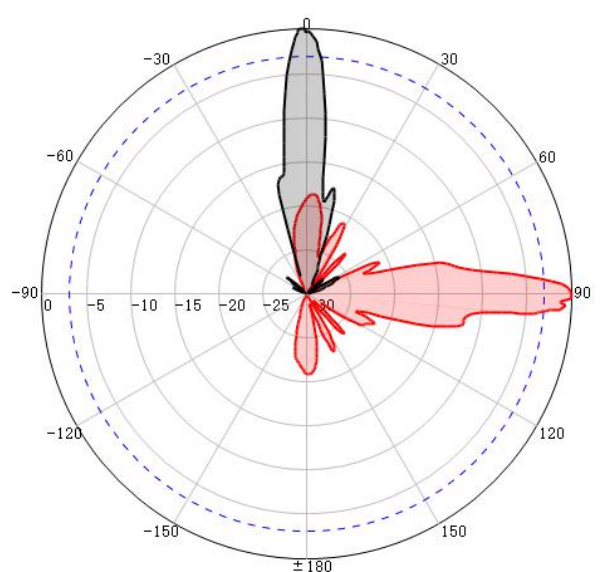

V-Pol@3500MHz

SANNY TELECOM EQUIPMENT CO., LIMITED

Address: Room 201 Building 1, Wanyang Industrial Park, No.82 Xiaotang Industrial Avenue,
Shishan Town, Nanhai District, Foshan City 528223, Guangdong Province, China

Tel: +86 757 8766 0070

Fax: +86 757 8766 0500

Email: sales@sannytelecom.com

Website: www.sannytelecom.com